


RSCH Series



Capacity:

13-95 ton

Stroke:

8-155 mm

Center Hole Diameter:

19.6-79.0 mm

Maximum Operating Pressure:

700 bar

RSCH 液壓單動，中空型千斤頂

- 中空柱塞設計，適用於推力及拉力之應用。
- 低外型、高揚程適用於緊塞空間。
- 液壓缸在最大行程亦能承載最大荷重。
- 外螺牙便於固定且各均附螺牙保護套。
- 特製中空襯管保護主軸及液壓缸內壁增加產品壽命。
- 主軸及液壓缸內壁硬鉻處理耐磨、抗腐蝕。
- 彈簧回縮。
- 防塵環設計可保護活塞、內徑及襯管避免污染。
- 上螺帽保護主軸超揚昇。
- 表面粉體塗裝美觀抗腐蝕、防銹。
- 各型號均含SQB-3/8UF快速接頭及防塵蓋。

Single-Acting, Hollow Plunger Cylinders

※Hollow plunger design allows for pulling and pushing application.

※Low profile and longer strokes fit in the tightest space.

※Withstands full "dead-end" loads.

※Collar threads for easy fixturing and all collar threads have a cap for protection.

※Special center tube protect plunger and inner of cylinder increases product life.

※Hard chrome plated plunger and inner of barrel resists wear and corrosion.

※Spring returing.

※Wiper rings protect the piston, bore & tube from contamination.

※Stop ring for piston blow-out protection.

※Powder coat finish for increased corrosion resistance and antirust.

※Come with SQB-3/8UF female coupler & dust cap.

	焊提把 Weldable
	吊環螺栓 Eyebolt
	活動提把 Removable strap handles
	螺牙式活動提把 Thread



提把型式 Handle type

(S) : 標準配件 standard equipped


(O) : 選配 option

- 焊提把 Weldable
- ★ 吊環螺栓 Eyebolt
- ▲ 活動提把 Removable strap handles
- 螺牙式活動提把 Thread

提把型式 Handle type	型號 Model Number	外部尺寸 Outer Dimension									
		能力 Cylinder Capacity	揚程 Stroke	受壓面積 Cylinder Effective Area	總油量 Oil Cap.	本身高 Collapsed Height	伸長總高 Ext. Height	外徑 Out. Diam.	內徑 Cylinder Bore Diam.	主軸直徑 Plngr. Diam.	底部前進油孔位置 Cyl. Base to Advance Port
		ton(kN)	(mm)	cm ²	cm ³	A (mm)	(mm)	D (mm)	E (mm)	F (mm)	H (mm)
	RSCH-120	13(125)	8	17.9	14	55	63	69	54.1	35.1	9
	RSCH-121		42	17.9	75	120	162	69	54.1	35.1	19
	RSCH-121A		42	17.9	75	120	162	69	54.1	35.1	19
	RSCH-1211		42	17.9	75	120	162	69	54.1	35.1	19
	RSCH-123		76	17.9	136	184	260	69	54.1	35.1	19
●	RSCH-202	20(215)	49	30.7	150	162	211	98	73.1	54.1	19
●	RSCH-204		102	30.7	311	242	344	98	73.1	54.1	19
●	RSCH-206		155	30.7	476	306	461	98	73.1	54.1	19
●	RSCH-302	30(326)	64	46.6	298	178	242	114	88.9	63.5	22
●	RSCH-304		102	46.6	473	233	335	114	88.9	63.5	22
●	RSCH-306		155	46.6	722	330	485	114	88.9	63.5	25
▲	RSCH-603	60(576)	76	82.3	626	247	323	159	123.9	92.2	31
▲	RSCH-606		153	82.3	1259	323	476	159	123.9	92.2	31
▲	RSCH-10013	95(931)	76	133.0	1011	254	330	212	165.1	127.0	38

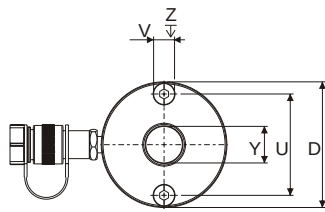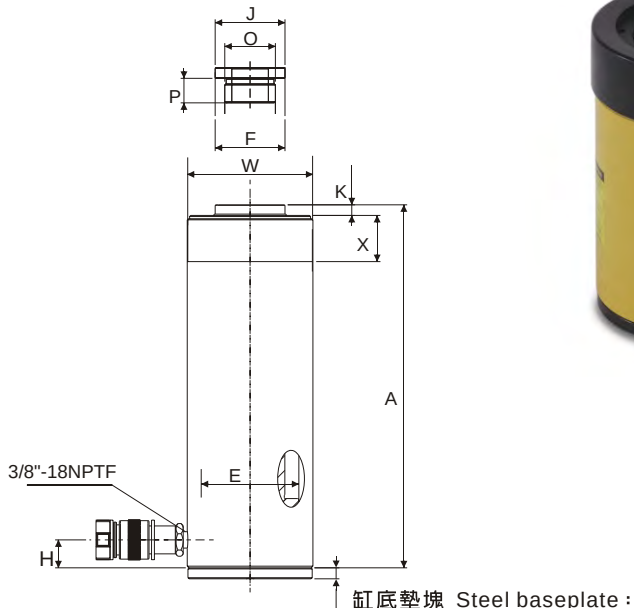

缸底墊塊底座螺孔
This drawing show the base mounting holes of barrel before setting steel base plate.



RSCH-120

● RSCH-120附有 1/4 NPT 孔配裝SQB3/8UF快速接頭
※ RSCH-120 includes SQB-3/8UF coupler and has 1/4 NPT port.



選配熱處理螺牙中孔墊塊Optional Heat Treated Hollow Saddles

型號-能力 Cylinder Model/Cap. (ton)	型 號 Model Number	墊塊尺寸 Saddle Dimensions		
		A (mm)	B (in)	C (mm)
RSCH-202,206	XKHCH-20	53	1"-8	9
RSCH-302,306	XKHCH-30	63	1-1/4"-7	9
RSCH-603,606	XKHCH-60	91	1-5/8"-5-1/2	12
RSCH-1003	XKHCH-100	126	2-1/2"-8	13

*所有 RSCH 系列千斤頂標準配置平滑中孔墊塊 (12噸系列不配置墊塊)
※ Smooth hollow saddles are standard on all RSCH series.
(12ton models are not equipped with saddles.)

型 號 Model Number	牙紋尺寸 Threads Dimension							底座螺孔 Base Mounting Holes			
	墊塊直徑	凸出高度	主軸內牙	內牙深度	油缸外牙	外牙長度	中孔直徑	底孔孔距	底座螺紋	螺紋深度	總 重
	Saddle Diam. J (mm)	Saddle Protr. from Plngr. K (mm)	Plunger Internal Thread O (in)	Plunger Thread Length P (mm)	Collar Thread W (in)	Collar Thread Length X (mm)	Center Hole Diam. Y (mm)	Bolt Circle U (mm)	Thread V (in)	Thread Depth Z (mm)	Wt. (kg)
RSCH-120	—	—	3/4"-16UN	16	2 3/4"-16	30	19.6	50.8	5/16"-18UNC	9.0	1.70
RSCH-121	—	—	—	—	2 3/4"-16	30	19.6	50.8	5/16"-18UNC	9.0	3.00
RSCH-121A	—	—	—	—	2 3/4"-16	30	20.5	50.8	5/16"-18UNC	9.0	3.00
RSCH-1211	—	—	3/4"-16UN	16	2 3/4"-16	30	19.6	50.8	5/16"-18UNC	9.0	3.00
RSCH-123	—	—	—	—	2 3/4"-16	30	19.6	50.8	5/16"-18UNC	12.7	4.60
RSCH-202	54	6.9	1 9/16"-16UN	19	3 7/8"-12	38	26.9	82.6	3/8"-16UNC	9.4	8.20
RSCH-204	54	6.9	1 9/16"-16UN	19	3 7/8"-12	38	26.9	82.6	3/8"-16UNC	9.4	10.50
RSCH-206	54	6.9	1 9/16"-16UN	19	3 7/8"-12	38	26.9	82.6	3/8"-16UNC	9.4	14.60
RSCH-302	63	9.7	1 13/16"-16UN	22	4 1/2"-12	42	33.3	92.2	3/8"-16UNC	14.0	11.55
RSCH-304	63	9.7	1 13/16"-16UN	22	4 1/2"-12	42	33.3	92.2	3/8"-16UNC	14.0	14.75
RSCH-306	63	9.7	1 13/16"-16UN	22	4 1/2"-12	42	33.3	92.2	3/8"-16UNC	14.0	22.45
RSCH-603	91	12.7	2 3/4"-16UN	19	6 1/4"-12	48	53.8	130.3	1/2"-13UNC	14.0	29.70
RSCH-606	91	12.7	2 3/4"-16UN	19	6 1/4"-12	48	53.8	130.3	1/2"-13UNC	14.0	37.00
RSCH-10013	126	12.7	4"-16UN	25	8 3/8"-12	60	79.0	177.8	5/8"-11UNC	19.0	53.50